

WARRANTY

Whitehaus Collection Point of Use Cold Water Faucets are warranted to be free of manufacture's defects on both material and workmanship for a period of 1 year.

Finishes: Polished Chrome, Brushed Nickel, Polished Nickel, and Oil Rubbed Bronze are warranted for 1 year.

Damage to a product caused by accident, misuse, abuse, or improper installation is not covered by the warranty. This includes improper care and cleaning or use of plumber's putty on our products. Silicon sealing compounds should only be used.

Proof of purchase (original sales receipt) must be provided with all warranty claims.

Whitehaus Collection is not responsible for label charges, installation, or other incidental or consequential costs. Liability under warranties expressed or implied is limited to replacement of defective goods only.

WHITEHAUS COLLECTION

If you have any questions, please call us at:

Phone: 800-527-6690


Fax: 800-694-4837

General inquiries: info@whitehauscollection.com


For purchase orders, email us at:
orders@whitehauscollection.com

WHITEHAUS COLLECTION


POINT OF USE COLD WATER FAUCETS

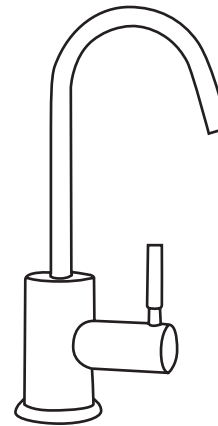

WHFH-C1010

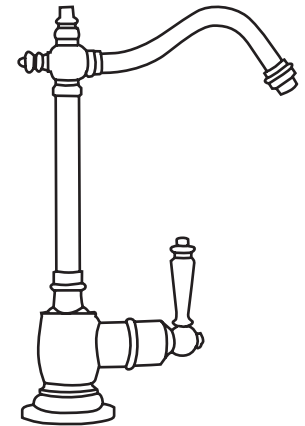

WHFH-C1006

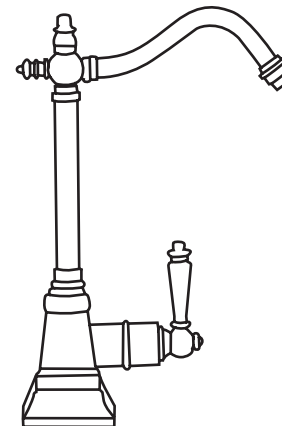

WHFH-C2011


INCLUDES:

FAUCET INSTALLATION
DIMENSIONS
MAINTENANCE
WARRANTY


FAUCET INSTALLATION

Before installing a new faucet, properly flush out the pipework to remove any debris.

1. Remove the compression nut, ferrule, locknut, friction washer and base washer from the faucet.
2. Seat o-ring in base groove. If desired a thin bead of silicone seal can be applied to the o-ring for added sealing power. Do not use plumber's putty.
3. Center the faucet in the mounting hole and fasten with base washer, friction ring and mounting nut. Do not overtighten.
4. Slide the 1/4" compression nut and ferrule over the supply tubing, insert the tube in the mounting nipple and tighten the compression nut on the mounting nipple. Do not overtighten.
5. Fully open the handle on the water faucet, and then turn on the water supply. Allow the water to run to rinse any debris from the system.
6. Check for leaks especially at the water supply attachments.

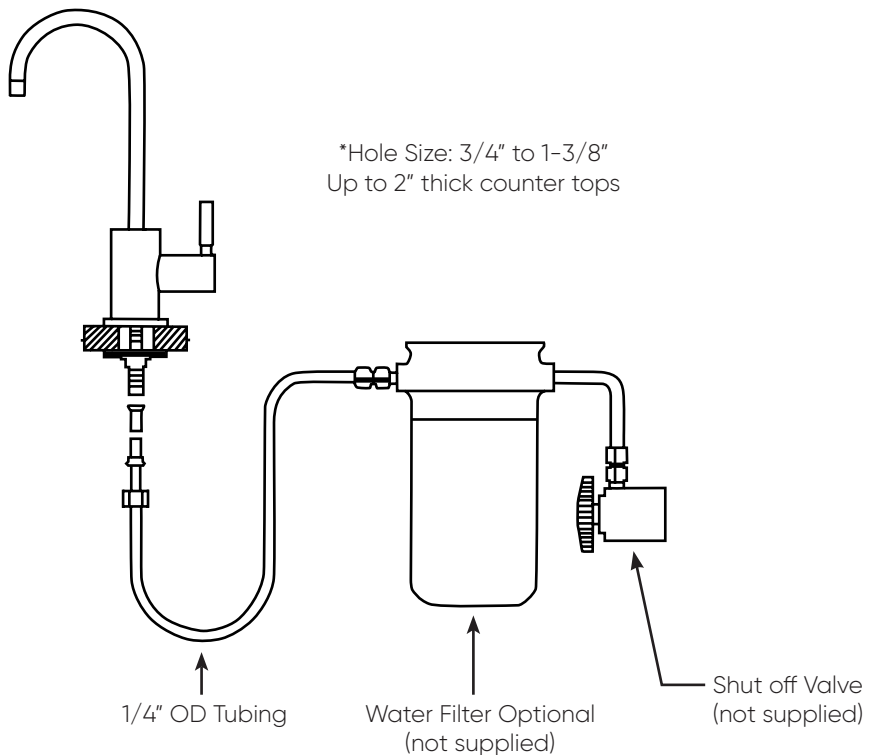

DIMENSIONS

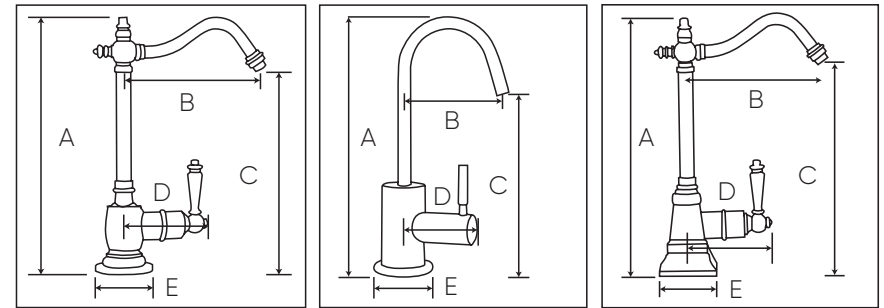

	WHFH-C1006	WHFH-C1010	WHFH-C2011
A	9 1/2"	9 1/2"	9 3/4"
B	5 3/8"	4"	5 3/8"
C	7 1/2"	6 3/4"	7 1/2"
D	3 1/2"	2 3/4"	3 1/4"
E	2 1/8"	2 1/8"	2 1/8"

MAINTENANCE

Chrome faucets: Use only liquid cleansers or soapy water. Anti-lime or acidic cleaners such as scouring agents or abrasive sponges are to be avoided. Polish with a soft cloth.

Special finish faucets: Clean faucet with mild soap and water. Wipe the entire surface dry with a dry, clean, soft cloth after each use.

DO NOT USE CLEANERS WHICH CONTAIN ACIDS,
HARSH CHEMICALS OR ABRASIVES.

